

HydraBaths reserves the sole authority to make any type of warranties or representations concerning HydraBaths or its products. HydraBaths will not be responsible for any warranties or representations made by any outside source, including dealers, retailers, distributors or contractors.

HydraBaths does not warrant that your tub was installed properly, or that the plumbing and electrical connections, and hookup to the HydraBaths' Whirlpool System were installed properly. HydraBaths has not installed, nor supervised nor contracted for the installation of the tub on which the System is assembled. Improper or negligent installation of your tub, alterations made to your tub or spa, or alterations or modifications to the System may cause the System to malfunction. Such problems are not covered by any warranty, express or implied, given by or otherwise imposed by law on HydraBaths.

This is the only warranty, expressed or implied, given by HydraBaths. Warranties implied under State Law, including any implied warranty of merchantability or fitness for a particular purpose, shall be limited to two (2) years from the original date of purchase, except for controls for commercial application which is limited to a one (1) year warranty. Finally, HydraBaths disclaims any liability for any incidental or consequential damages.

RETURNED MATERIALS PROCEDURE

The following procedure must be adhered to when returning HydraBaths warranted products:

- A. First contact the tub manufacturer who is warranted by HydraBaths.
- B. If they are unable to assist you, call and obtain a Returned Materials Authorization (RMA) number from HydraBaths' Service Department. The following must be provided in order to obtain an RMA from HydraBaths:
 1. Condition and Type(s) of item(s) under warranty.
 2. Detailed specifics on reason for return of HydraBaths products that have failed under warranty.
 3. Date when product was originally purchased.
- C. When shipping product back to HydraBaths, please note the following procedures:
 1. All warranted merchandised being returned with an RMA must come prepaid to HydraBaths. Any credit that is to be issued on freight will be so stated on the RMA.
 2. The RMA number must be noted on both the packing slip and the box on which the merchandise is being returned.
 3. HydraBaths disclaims any liability for any merchandise damaged in freight during return to HydraBaths. All returned merchandise should be shipped freight prepaid to:

HydraBaths' Service Department
2100 S. Fairview
Santa Ana, CA 92704



HyLite Chromatherapy System Model HL1XXX

IMPORTANT SAFETY INSTRUCTIONS

When installing and using this electrical equipment, basic precautions should always be followed, including the following:

READ AND FOLLOW ALL INSTRUCTIONS

WARNING

- Risk of electric shock. Connect only to a grounded type receptacle protected by a Ground-Fault Circuit Interrupter (GFCI). Contact a qualified electrician if you cannot verify that the power supply is protected by a GFCI.
- Before making any electrical connections, make certain the electrical power is turned OFF at the circuit breaker and take measures to ensure that it CANNOT accidentally be turned on again.
- All electrical connections should be made by a licensed electrician in accordance with all applicable local and national codes.
- To reduce risk of electric shock, replace damaged cord immediately. Do not use an extension cord to connect unit to electric supply; provide a properly located outlet.
- Install to permit access for servicing.

SAVE THESE INSTRUCTIONS.

Follow all instructions closely. Any misuse of the product will void all certifications and HydraBaths' warranty.

INSTALLATION INSTRUCTIONS

Electrical wiring of the HyLite Chromatherapy system, installation, repair and service must be in accordance with local and all other applicable codes. Make sure the power is OFF from source before installation.

A. Power Supply Connections

- 1) Install an appropriately rated power outlet (receptacle) in a suitable location near the pump.

B. Light Unit(s)

- 1) Drill a 1-11/16 hole in the wall of the tub at each location for a light unit (A in photo). Place a bead of silicone around the flange of the light unit and assemble through the hole in the tub by tightening the provided nut hand tight.

C. Control Button

- 1) Drill a 1-5/16" hole in the deck or wall of the tub above the water line in any convenient location accessible to the occupant of the tub. The location should be in an area where bath-water splash and shower spray are minimal. Pass the button's cable through the hole from inside of tub and install the button unit (B in photo) on the tub using the nut provided with the button.

D. Control Box

- 1) Attach the control box (C in photo) to the outside of the bathtub, or to the wall near the power outlet using a screw (not provided) through the mounting hole on the box.

E. Wiring Connections


- 1) Connect the button unit to the connector on the control box via the modular connector at the end of the cable to the matching female connector on the box (2 in photo).
- 2) Plug in the power supply (D in photo) into the outlet receptacle. Plug the end of the power supply cable into the control box through the hole on the right hand side (3 in photo).
- 3) Connect the light unit(s) using the supplied cables. Plug the modular connector into the light unit, and plug the circular connector into the mating receptacle on the control box (1 in photo).
- 4) Route and secure all cables to protect them from accidental damage and strain.

F. Do not make any additions, deletions or modifications to the unit. It may be hazardous and will void the warranty.

G. Provide an appropriate access door or panel for service.

OPERATING INSTRUCTIONS

1. Ensure the power is On to the unit and the white light in the keypad of the control button unit is lit.
2. The "0/I" button is used to turn the unit On and Off. The "▶/II" button is used to change from "Play" mode to "Pause" mode.
3. When the light(s) are On, and the control is in Play mode, the control keypad will have a solid white light and the light(s) will change through eight colors over a
NOTE: The keypad light stays blue (or OFF in some models) as long as the pump is ON.
4. The pump stays ON for the pre-determined duration (usually 20 minutes) and then turns OFF automatically. Press the keypad again if more time is required.

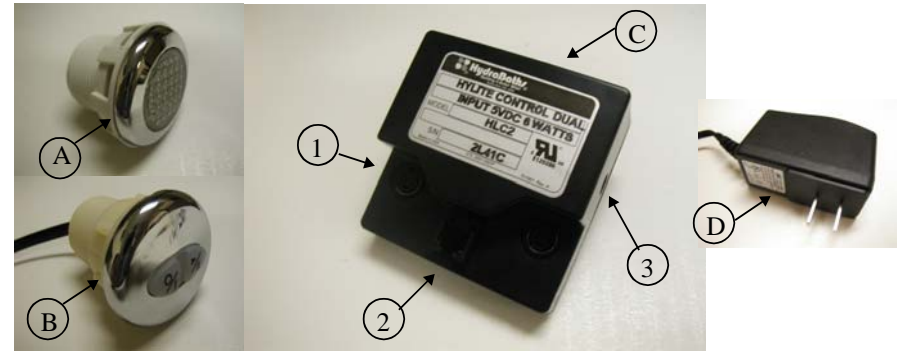

4. Pressing the 0/I button will turn the light(s) Off. When the light(s) is turned back On, it will come On in the color and mode of when it was last turned Off.
- period of approximately one minute. Pressing the ▶/II button will cause the white light on the keypad to slowly fade in and out, indicating Pause mode. The light(s) can be paused at any point of the cycle. Pressing the ▶/II button again will return the light(s) to play mode.

ELECTRONICS 2 YEAR LIMITED WARRANTY

HydraBaths warrants their electronic products, but no other products, to be free from defects in workmanship and material under normal use and conditions for a period of two (2) years from the date of original purchase. This warranty relates to all HydraBaths' electronic products, including controls, buttons and bezels. Warranties with regard to HydraBaths' Pneumatic Switch, Blowers, Heaters, Pumps and all Whirlpool System Fittings and Components are separate and apart from this warranty, and purchasers are directed to review such warranties independent of this warranty.

Should service be required by reason of any defect or malfunction during the two (2) year warranty period for HydraBaths' electronic products, HydraBaths will repair, or at its discretion, replace this product without charge, subject to verification of the defect or malfunction. No credits or refunds will be applied to electronic products which warrant service or replacement during the warranted period.

HydraBaths will not be responsible for any water damage or any HydraBaths' System found to have been damaged by water. HydraBaths will assume no responsibility for loss of the System, inconvenience due to loss, damage to personal or real property or any other consequential damage. HydraBaths will not be liable for any incidental expenses or material charges in connection with removal or replacement of any parts or System.

This warranty shall not apply to any type of failure resulting from negligence, abuse, misuse, misapplication, improper installation, alteration or modification, chemical corrosion or improper maintenance. There will be a charge for replacement parts or replacement of the entire electronic unit if the defective unit is returned for any of the reasons listed above.